

Hardware Spec


PARAMETER	DETAIL
Weight (Lock only)	4.2 Lbs
Working Current	250 mA
Idle Current	15 μ A
Motor Running Time	0.4 Second
Working Voltage	4.2-6.4V
Low Battery Warning	4.2V
Power Source	4 AA Alkaline Battery
Keypad	Weather Resistant backlit
Handle	Non handed
Door Thickness	1 3/8" to 2"
Keyway	SC 6 Pin
Lock Dimension	Front 6"(H)x2.5"(W)x3"(L) Back 6"(H)x2.5"(W)x2.5"(L)
Package Dimension (1ps)	10 x 8 x 3 1/4"
Package Dimension 6pcs/CTN)	16 1/2 x 10 1/2 x 10 1/2"
Package Weight (1)	5 Lbs
Weight (6pcs/Box)	30 Lbs




Software Spec

Description	Software	Non-software
Audit Trail	Yes. 4,000	No
Users	800	299
Timed Operation	Yes	Yes
Remote Access	Yes	Yes
Storehouse/Classroom Mode	Yes	Yes
One Time User	Yes	Yes
Software Package	Yes	No
Lock from Inside	No	No
Set Up Method	Software	Keypad
Daylight Saving	Yes	Yes
Lock Out Function	Yes	Yes

Regular Latch




Deadbolt Mortise

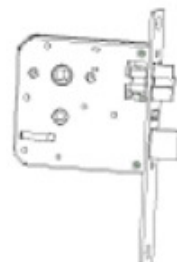

Mortise Spec

3/4" throw heavy duty deadbolt with anti-saw hardened pins
Rustproof heavy duty 2 3/8" backset lock case
Individual spring to prevent lever sag, easily reversible
Forged brass lever handles exceed requirements of ADA
Auxiliary latch bolt
Heavy Duty 1/2" latch bolt with anti-friction latch, easily reversible
Interconnected Deadbolt Mortise:
While unlocked turn the handle up to enable (lock) the deadbolt, or turn the handle down to disable (unlock) the deadbolt

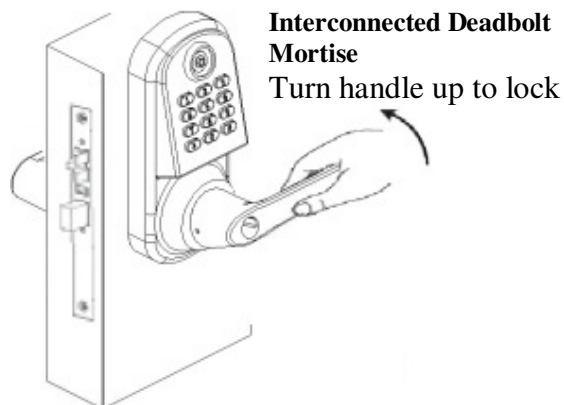

Ordering Information:

PART	DESCRIPTION	PART	DESCRIPTION
E5TKSCS	E5 Software Lock	D-1977	Programming Key
E5TKSC	E5 Non-Software Lock	D-1994/1904	Clock Key
D-MC	Master Cylinder	D-1990	User Key
USBPCA/UIBPCR	Programming Encoder	IKeypad	Software CD